

G-2RE1

GPS/GLONASS/QZSS/Galileo Ceramic 15x15x4mm Antenna

DIP

GNSS

The GPS/GLONASS/QZSS/Galileo Ceramic Surface Mount (G-2RE1) is designed with a high degree of standards for global navigational connectivity and no compromise on efficiency. The compact size G-2RE1 outperforms any competitor within GPS, QZSS, Galileo and GLONASS standards. With directional hemispherical radiation pattern and peak gain of 3 dBi, the G-2RE1 operates within 1561 ~ 1602 MHz frequencies and is the best solution for tracking/mapping devices, industrial machinery, sea vessels, air/automobile navigation and any compatible devices that require constant global connectivity with precision guidance.



15 x 15x 4 mm

Document Information

Product	G-2RE1
Part Number	G-2RE1
Description	GPS/GLONASS/QZSS/Galileo Ceramic 15x15x4mm Antenna
Version	2.0 (current)
Date	04-July-2023
Status	Released

Revision History

Version	Date	Author	Changes
1.0	16-Dec-2020	Amy Li	Initial Release
2.0	04-July-2023	Hazel Xu	New layout and design

Product Overview

Product Description

The GPS/GLONASS/QZSS/Galileo Ceramic Surface Mount (G-2RE1) is designed with a high degree of standards for global navigational connectivity and no compromise on efficiency. The compact size G-2RE1 outperforms any competitor within GPS, QZSS, Galileo and GLONASS standards. With directional hemispherical radiation pattern and peak gain of 3 dBi, the G-2RE1 operates within 1561-1602 MHz frequencies and is the best solution for tracking/mapping devices, industrial machinery, sea vessels, air/automobile navigation and any compatible devices that require constant global connectivity with precision guidance.

Key Features

- High Gain
- Compact Size and Low Profile
- Pin Type
- Customization Available
- RoHS Compliance

Applications

- Automotive navigation
- PND
- Surveying equipment
- Healthcare monitoring devices
- Laptop

Electrical Specifications

Frequency			VSWR	Peak Gain	Efficiency
BDS	1561	MHz	1.5	3.0 dBi	50%
GPS	1575	MHz	1.5	3.0 dBi	50%
GLONASS	1602	MHz	1.5	3.0 dBi	50%

Antenna

Frequency Range 1561 ~ 1602 MHz

Impedance 50 Ω

Polarization RHCP

Band Width CF $\pm$ 3 MHz

Radiation Pattern Hemispherical


Mechanical Specifications

Type	Internal	Casing	NA
Dimensions	15 x 15 x 4 mm	Color	Yellow
Connector (Termination)	NA	Material	Ceramic
Mounting Type	DIP Mount	Weight	TBC (to be confirmed)

Caution:

1. Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components, as this will cause damage to the component.
2. Do not expose the component to an open flame.
3. This specification applies to the functionality of the component as a single unit. Please ensure the component is thoroughly evaluated in the application circuit.

Product Image and Dimensions

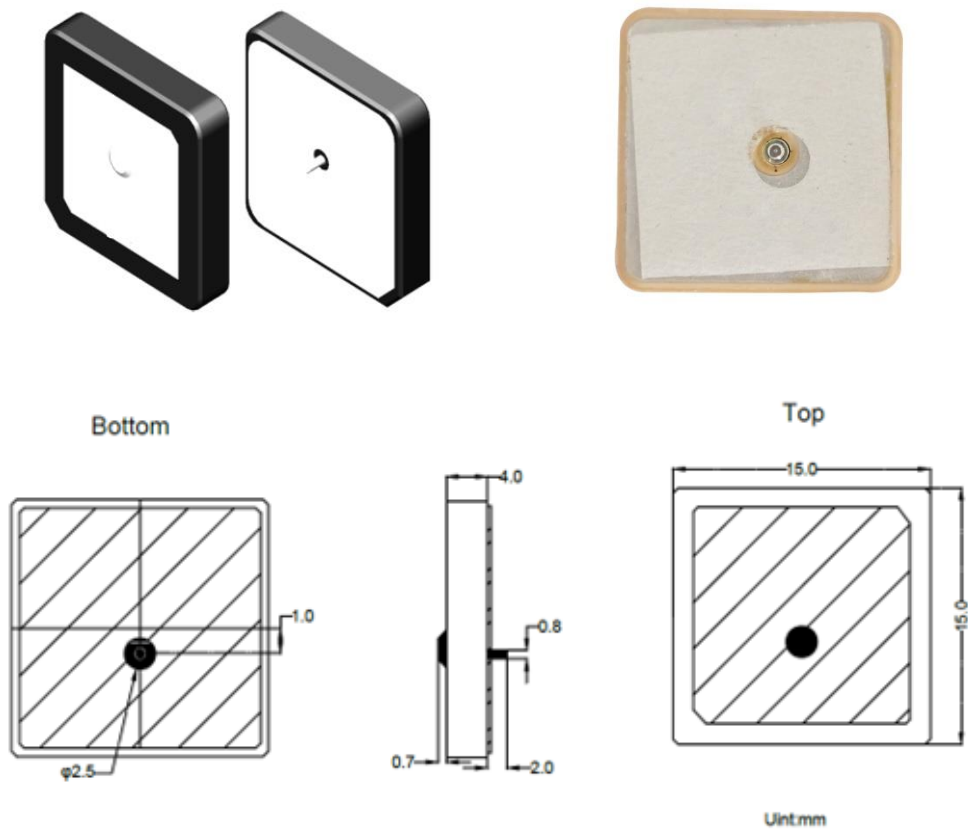

Environmental Data

Operating Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
IP Rating	NA
Compliance	RoHS

Ordering Information

Product Variants

Part Number	Description
G-2RE1	GPS/GLONASS/QZSS/Galileo Ceramic 15x15x4mm Antenna

About MIOT

Miot Wireless Solutions, headquartered in Suzhou, China, was established in 2017. It has subsidiaries in Canada, the United States, Brazil, and EMEA. MIOT is a professional designer and manufacturer of Antennas and IoT PCBA products, providing turn-key service to customers worldwide.

Our talented R&D team has experienced antenna, hardware, and software engineers who can participate in your new project, from something simple like antenna/selection and design, to complete turn-key services, which entails taking your concept and ideas through design, prototyping, debugging, certification, and manufacturing. Miot offers reliable products at reasonable prices with fast delivery times to help you get ahead in the market.

Contact

MIOT Wireless Solutions Co. Ltd.
120-5800 Ambler Dr, MISSISSAUGA
ONTARIO L4W 4J4
Canada

Website: www.mioticsolutions.com
Email: info@miotsolutions.com

The information contained herein is provided "as is" and MOIT assumes no liability for using the information. No warranty, either express or implied, is given, including but not limited to the accuracy, correctness, reliability, and fitness for a particular purpose of the information. This document may be revised by MOIT at any time.

MIOT reserves all rights to this document and the information contained herein. Reproduction, use, modification, or disclosure to third parties of this document without express permission is strictly prohibited.

Copyright © 2023, MIOT Wireless Solutions Ltd. All Rights Reserved



www.mioticsolutions.com

