

G-1RK2

GPS/GLONASS/BD Active Antenna

Adhesive

GLONASS

This compact antenna G-1RK2 is designed and tuned with precision for navigational automotive applications and fleet management that operate within 1561~1602 and 1176MHz bands. With easy peel-n-stick adhesive mount combined with a compact size form factor make this antenna a popular choice for temporary or permanent installations.

This antenna is designed with a high active GNSS gain of 28 dB @ 3.3-5V and will maintain constant M2M signal strength for maximum precision.



48 x 48 x 19 mm

Document Information

Product	G-1RK2
Part Number	G-1RK2
Description	GPS/GLONASS/BD Active Antenna
Version	2.0 (current)
Date	20-Sep-2023
Status	Released

Revision History

Version	Date	Author	Changes
1.0	16-Dec-2020	Amy Li	Initial Release
2.0	20-Sep-2023	Ivy Liao	New layout and design

Product Overview

Product Description

This compact antenna G-1RK2 is designed and tuned with precision for navigational automotive applications and fleet management that operate within 1575~1602 and 1176 MHz bands. With easy peel-n-stick adhesive mount combined with a compact size form factor make this antenna a popular choice for temporary or permanent installations.

This antenna is designed with a high active GNSS gain of 28 dB @ 3.3-5V and will maintain constant M2M signal strength for maximum precision.

Key Features

- High Gain
- Compact Size and Low Profile
- Pin Type
- Customization Available
- IP66 rated
- RoHS Compliance

Applications

- Automotive navigation
- PND
- Surveying equipment
- Healthcare monitoring devices
- Laptop

Electrical Specifications

Frequency			VSWR	Peak Gain
BDS/ GPS/ GLONASS	1561.098~1602	MHz	1.5	3dBi
GPS	1176	MHz	1.5	3 dBi

Antenna

Center Frequency	BDS-B1/GPS-L1/GLONASS-G1:1561.098~1602 MHz GPS-L5:1176 MHz	Band Width	CF±5MHz
Impedance	50 Ω	Electrical Type	Monopole
Polarization	RHCP	Gain	3DBi@PCB (Zenith)
VSWR	≤1.5		

LNA

Boost Gain	28±2dB	Noise Figure	<1.0
Filter Insertion Loss	<3dB	VSWR	≤2.0
Supply Voltage	3.3~5V DC	Current Consumption	<45mA


Mechanical Specifications

Dimensions	48 x 48 x 19mm	Color	Black
Connector (Termination)	FAKAR-C or others	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
Cable	RG174 (3M)	Cable Length	3m(default)
Mounting Type	Screw/Adhesive	Weight	TBC (to be confirmed)

Caution:

1. Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components, as this will cause damage to the component.
2. Do not expose the component to an open flame.
3. This specification applies to the functionality of the component as a single unit. Please ensure the component is thoroughly evaluated in the application circuit.

Product Image and Dimensions

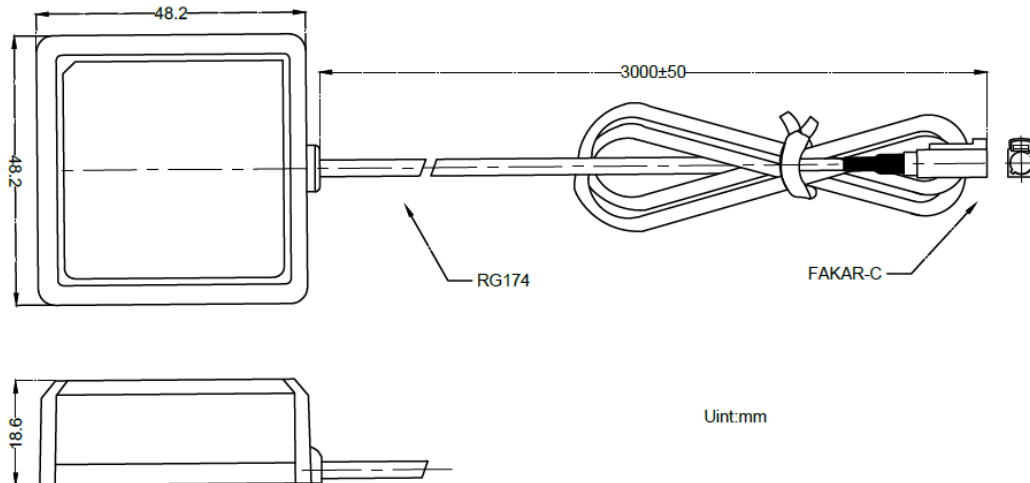


Radiation Pattern



A radiation pattern is a graphical representation of the directional properties of an antenna. It shows how electromagnetic waves are distributed in space in relation to the direction of propagation.

By understanding the information provided by a radiation pattern, it is possible to optimize the design and performance of an antenna for specific applications.



XY Plane (H)

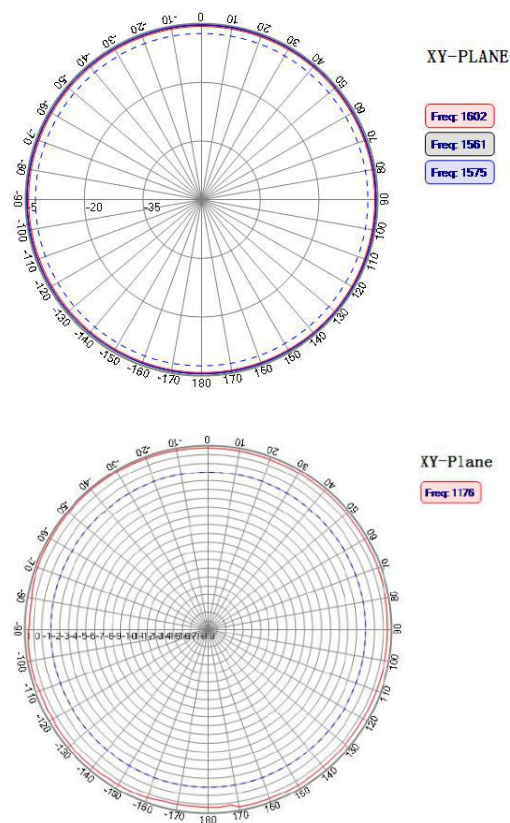

XZ Plane (E1)

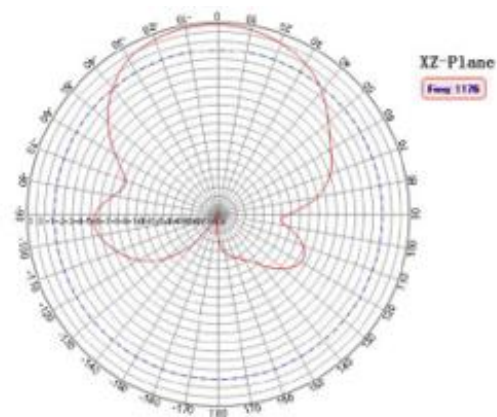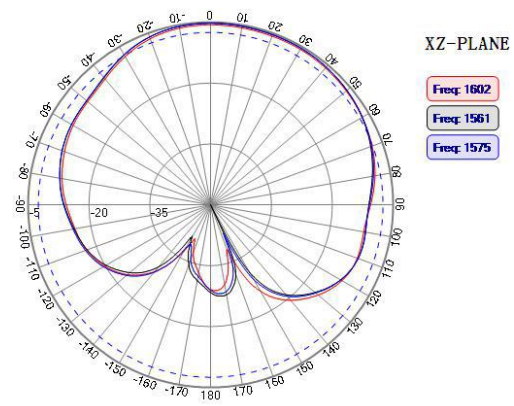

YZ Plane (E2)

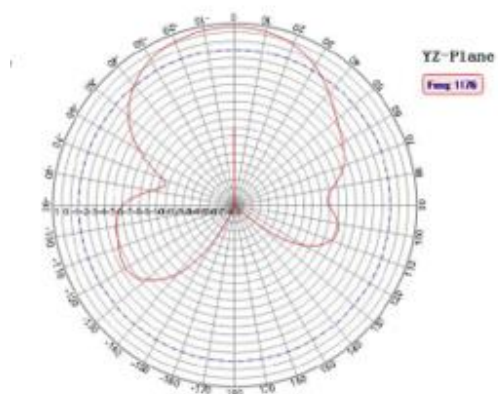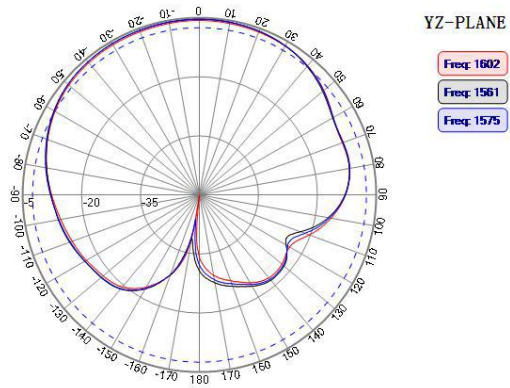

Environmental Data

Operating Temperature	-40 °C to +85 °C
Relative Humidity	Up to 95%
Compliance	RoHS

Ordering Information

Product Variants

Part Number	Description
G-1RK2	GPS/GLONASS/BD Active Antenna

About MIOT

Miot Wireless Solutions, headquartered in Suzhou, China, was established in 2017. It has subsidiaries in Canada, the United States, Brazil, and EMEA. MIOT is a professional designer and manufacturer of Antennas and IoT PCBA products, providing turn-key service to customers worldwide.

Our talented R&D team has experienced antenna, hardware, and software engineers who can participate in your new project, from something simple like antenna/selection and design, to complete turn-key services, which entails taking your concept and ideas through design, prototyping, debugging, certification, and manufacturing. Miot offers reliable products at reasonable prices with fast delivery times to help you get ahead in the market.

Contact

MIOT Wireless Solutions Co. Ltd.
120-5800 Ambler Dr, MISSISSAUGA
ONTARIO L4W 4J4
Canada

Website: www.mioticsolutions.com
Email: info@miotsolutions.com

The information contained herein is provided "as is" and MOIT assumes no liability for using the information. No warranty, either express or implied, is given, including but not limited to the accuracy, correctness, reliability, and fitness for a particular purpose of the information. This document may be revised by MOIT at any time.

MIOT reserves all rights to this document and the information contained herein. Reproduction, use, modification, or disclosure to third parties of this document without express permission is strictly prohibited.

Copyright © 2023, MIOT Wireless Solutions Ltd. All Rights Reserved



www.mioticsolutions.com

